


Midland County Weight & Axle Load Limits

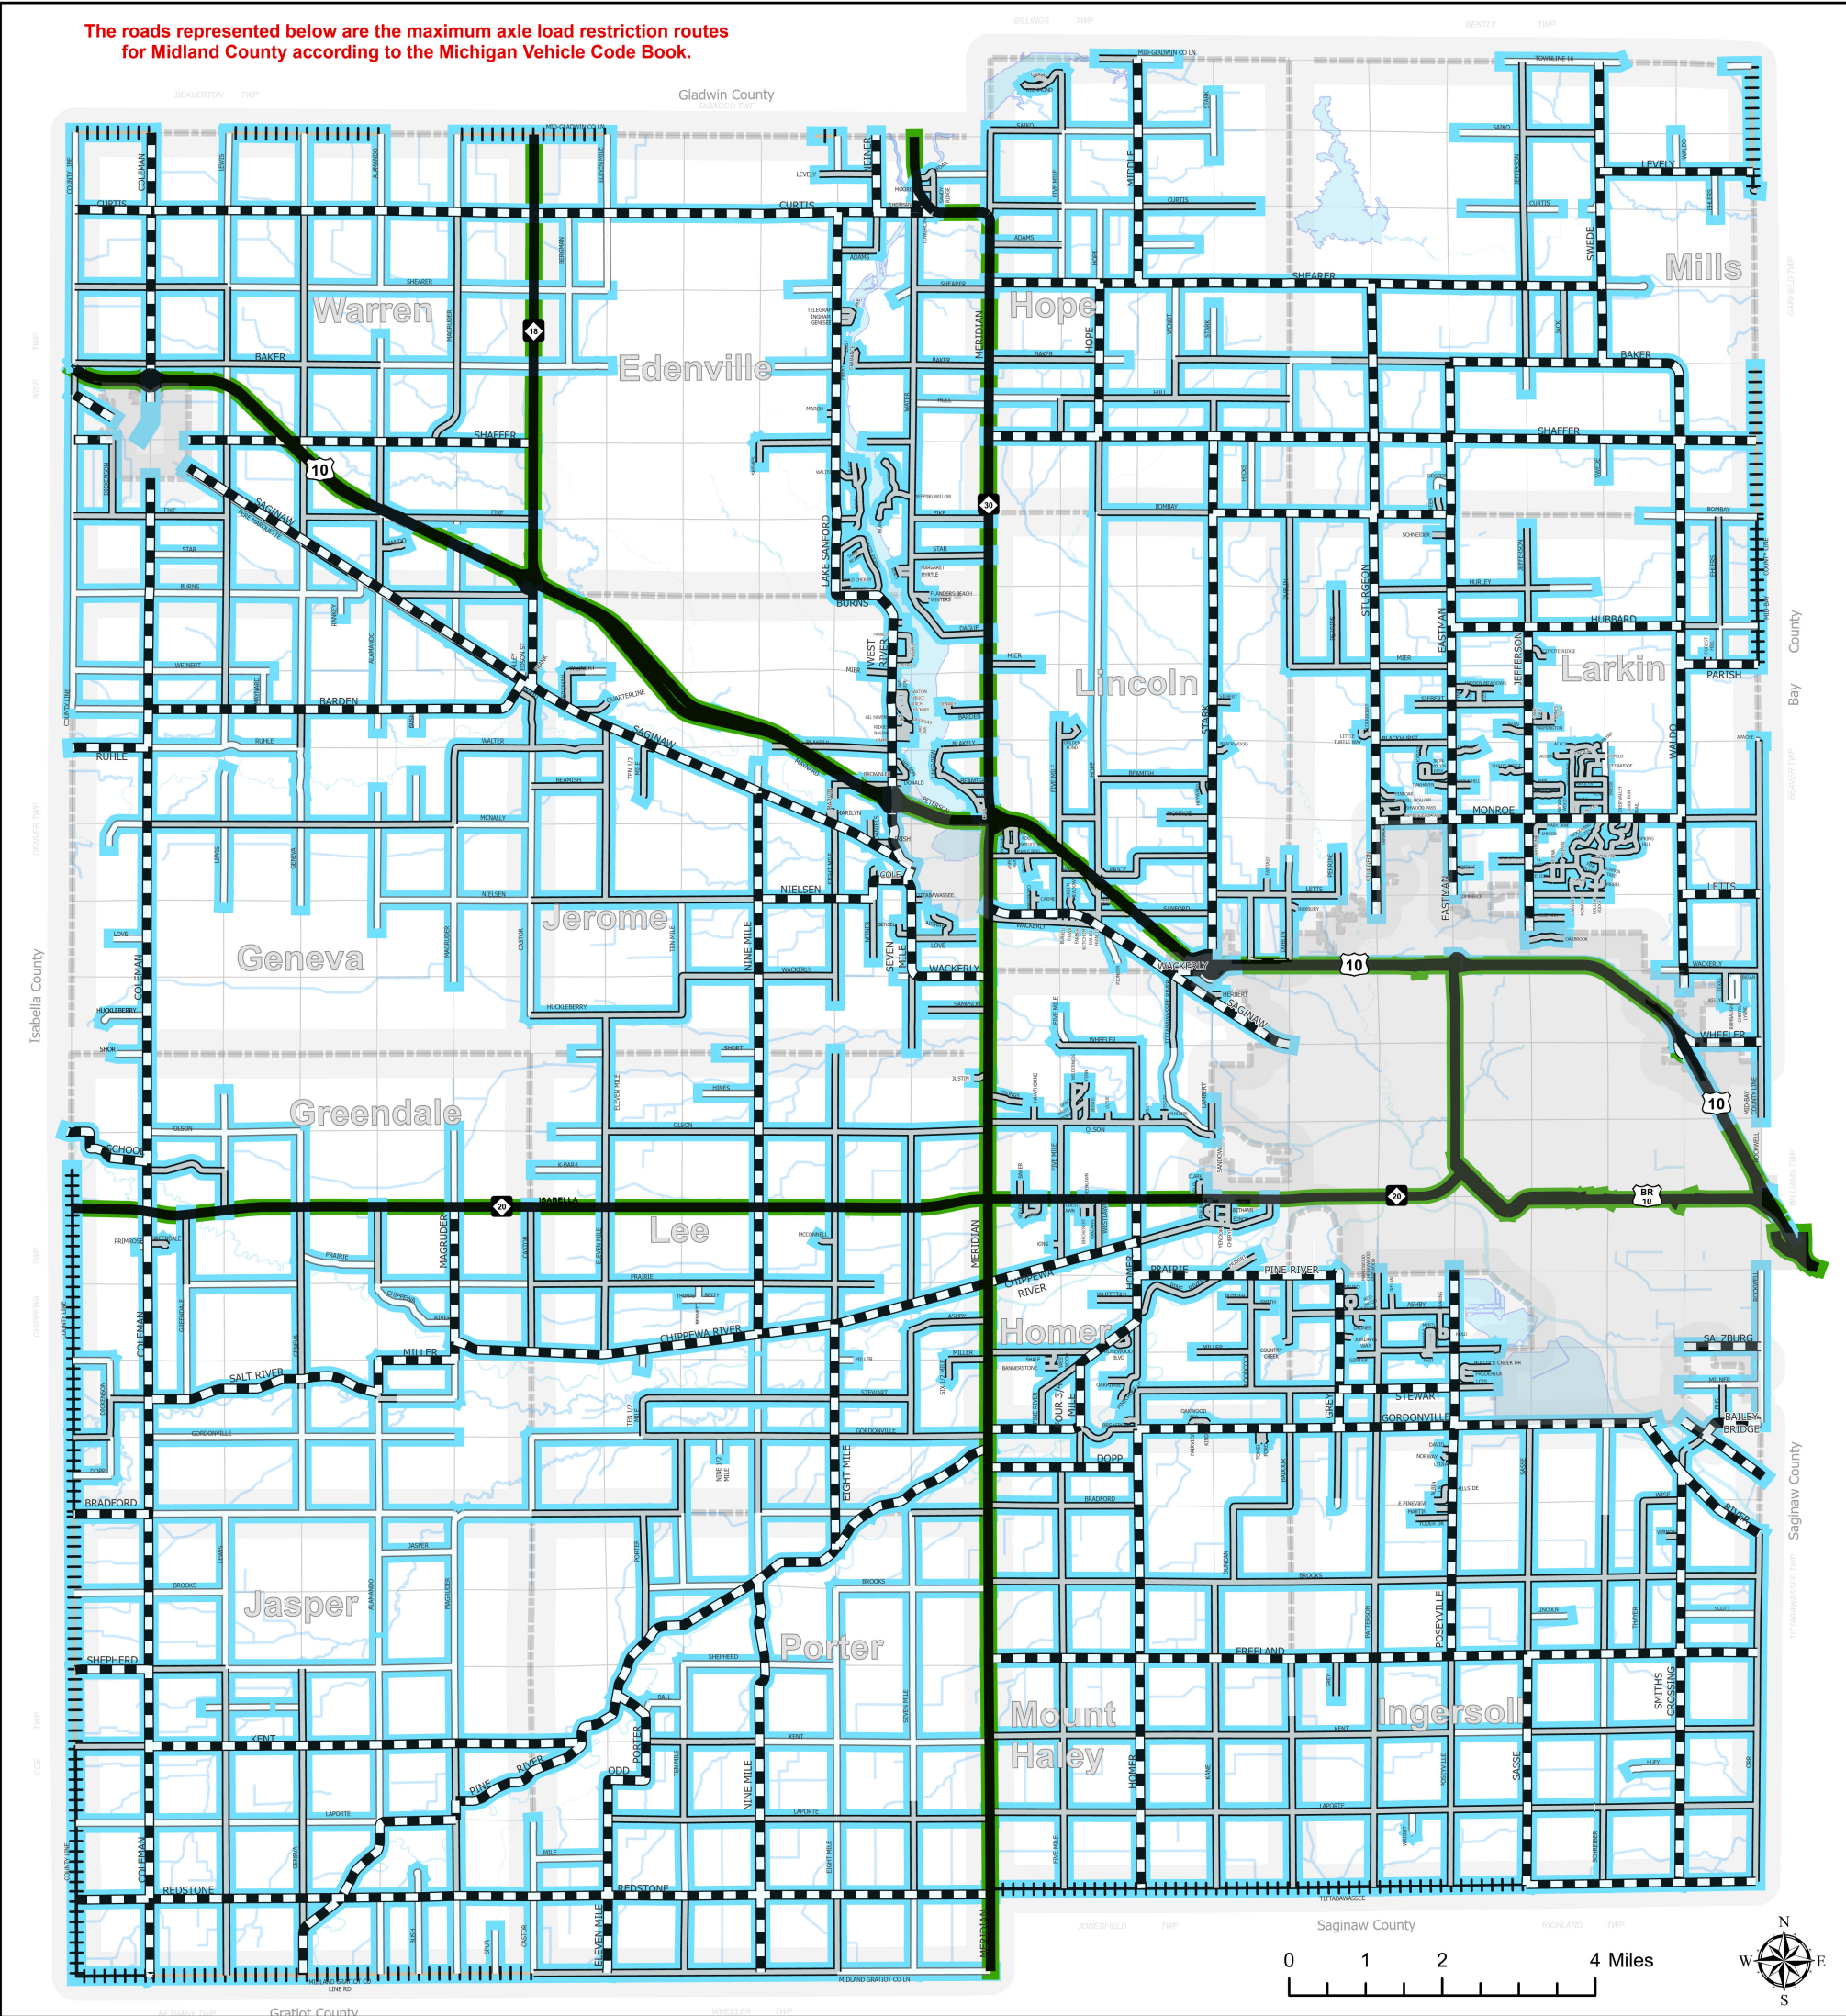

MICHIGAN VEHICLE CODE (EXCERPT)
Act 300 of 1949

257.722 Maximum axle load; normal loading maximum; designating highways as adequate for heavier loading; restrictions as to tandem axle assemblies; exceptions; public utility vehicles; normal size of tires; maximum wheel load; reduction of maximum axle load on concrete pavements during March, April, and May; exemptions; suspension of restrictions; determination of gross vehicle weight and axle weights; designation of highways for operation of certain vehicles; increase in axle loading maximums; engine fueled by compressed or liquefied natural gas; definitions.

Sec. 722.

1) Except as otherwise provided in this section, the maximum axle load shall not exceed the number of pounds designated in the following provisions that prescribe the distance between axles:

(a) If the axle spacing is 9 feet or more between axles, the maximum axle load shall not exceed 18,000 pounds for vehicles equipped with high pressure pneumatic or balloon tires.

(b) If the axle spacing is less than 9 feet between 2 axles but more than 3-1/2 feet, the maximum axle load shall not exceed 13,000 pounds for high pressure pneumatic or balloon tires.

(c) If the axles are spaced less than 3-1/2 feet apart, the maximum axle load shall not exceed 9,000 pounds per axle.

(d) Subdivisions (a), (b), and (c) shall be known as the normal loading maximum.

Legend

Designated Loading

Special Designated

NOTE: NO DESIGNATED ROUTES IN MIDLAND COUNTY

Roads

STATE HIGHWAY

PRIMARY

COUNTY LOCAL - PAVED

COUNTY LOCAL - UNPAVED

ADJACENT COUNTY - PAVED

ADJACENT COUNTY - UNPAVED

CITY MAJOR

CITY MINOR

This map was last updated on 2/21/2023



Midland County Road Commission
2334 North Meridian Road
Sanford, Michigan 48657
Office: 989-687-9060 Fax: 989-687-9121